


SURFACE MOUNT DOWNLIGHT

WIRING INSTRUCTIONS




COLLINGWOOD
LIGHTING LTD

①

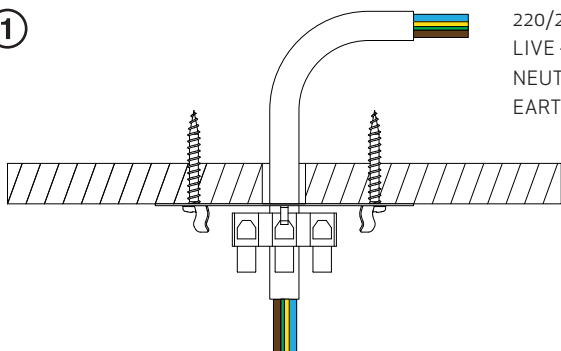

220/240v AC 50/60Hz
LIVE - L(F) Brown
NEUTRAL - N (N) Blue
EARTH - E ⊕ Yellow/Green


②

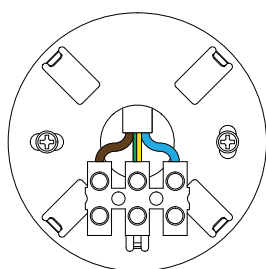


INSTALLATION SEQUENCE

1. Cut hole in ceiling and feed mains cable through.
Pull mains wire through hole in bracket. Fix bracket to ceiling using screws and rawl plugs as required.
2. Connect mains wire to connector block.
3. Connect the mains wire from the downlight unit to the connector block. Support the weight of the unit when doing this. Note: The ceiling bracket earth tab is already connected to the connector block. The driver is double insulated and does not require an earth.
4. Push the fitting up onto the spring tabs of the bracket.

③

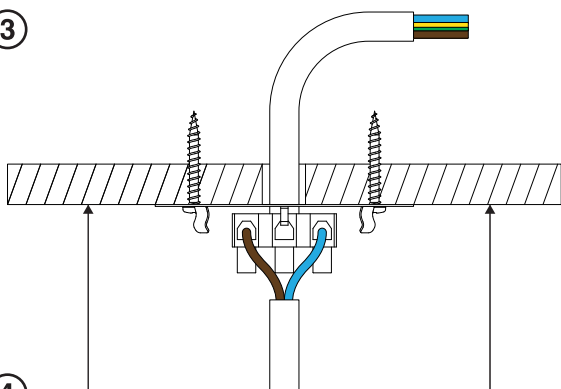

④

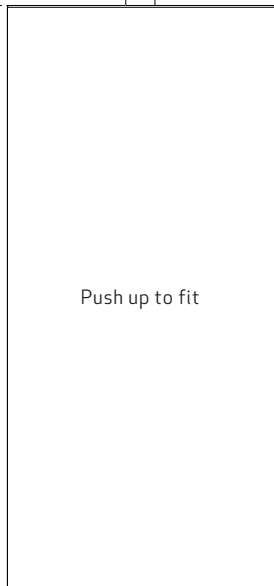

⑤

